


550  
KVA

POWER



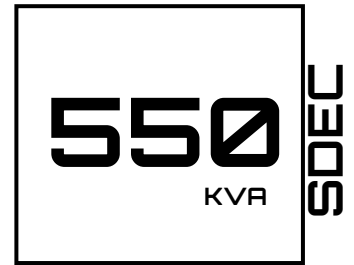

GENERAL FEATURES		PRIME	STANDBY
Power	KVA	495	550
Power	KW	396	440
Power	(cos Phi=0,8) A	712.8	792
Standard Voltage	V	400/230	
Revolutions per minute	r.p.m	1500	
Rated at power factor	Cos Phi	0,8	

**STANDBY POWER;**

It is the limited time operating power under variable load. Used as backup power at mains power failure. Overloads are not allowed.

**PRIME POWER;**

It is the continuous operating power under variable load. According to ISO 3046, 10% overload is allowed for 12 hours.




**STANDARD FEATURES**

- 4 Stroke, 1500 RPM, water cooled heavy duty diesel
- Dry type replaceable air filter
- Radiator capable of cooling up to 50 ° C
- Flexible oil pipes and oil draining valve
- Pre-heater
- 4 Poles, synchronize, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis.
- Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram
- User manual and operating manual

**OPTIONAL FEATURES**

- Soundproof canopy
- Automatic transfer switch
- Circuit breaker
- Trailer / Land transport
- External fuel tank
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manuel )
- Analogue indicators
- 1 - 3 Phase switch plugs
- Alarm system for fuel level
- Remote control monitoring system

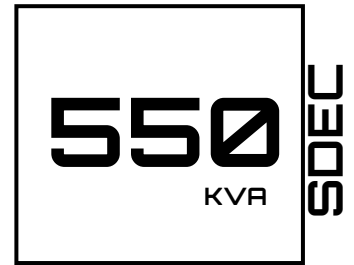

## ENGINE SPECIFICATION


Brand		SDEC
Model		QST13H516
Engine Standby Power	(kWm / hp)	450/603.46
Revolutions Per Minute	(r.p.m.)	1500
Total Volume	(L)	14.16
Number of Cylinder		6 IN LINE
Bore x Stroke	(mm x mm)	135 x 165
Compression Rate		15.55: 01
Governor Type		ELECTRONIC
Cooling System		TURBO CHARGER INTERCOOLED
Spray Shape		DIRECT
Cooling Shape		WATER COOLED
Electric System	(VDC)	24
Lubrication Oil Capacity	(L)	41
Engine Coolant Capacity	(L)	25.5
Fuel Tank	(L)	580
Maximum Exhaust Gas Temperature	(°C)	600
Maximum Exhaust Gas Flow	(m3/h)	3020
Maximum Allowed Back Pressure	(kPa)	5
Cooling Air Flow	(m3/min)	1170
Fuel Consumption 50%	(L/h)	54
Fuel Consumption 75%	(L/h)	76
Fuel Consumption 100%	(L/h)	100

\* Replaceable cylinder jacket \* Dry type replaceable oil filter \*Heat –resistant radiator for 50 °C

## ALTERNATOR SPECIFICATIONS

Output Voltage	(V)	400/230
Frequency	(Hz)	50
Stationary Voltage Regulation	(±)	1 %
Short Circuit Current		> 300 %
Insulation		H
Protection		IP 23
Efficiency	(%)	92.7
Overloading		%110 FOR 1 HOURS
Power Factor	(cos Ph)	0.8
Total Harmonic Distortion Rate		THF < 2 %
Connection Type		STAR
Number Of Pole		4
Number Of Bearing		SINGLE


\*4 Poles, Self – Excitation and Self-Cooled , Brushless , Synchro type alternator \*Electronic type automatic voltage regulator [ AVR ]

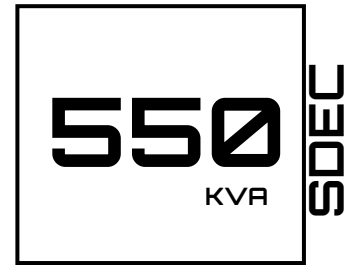

## CONTROL PANEL SPECIFICATION


- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable languages
- Waveform display of V & I
- Harmonic analysis of V & I
- 16 Amp / 250V ŞK / JK outputs
- 8 configurable digital inputs
- 8 configurable digital outputs
- 3 configurable analogue inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Outputs expandable to 40
- Inputs expandable to 40
- 4 configurable analog inputs
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal
- Manual “speed fine adjust”
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Mains power counters
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics display
- Configurable through USB, RS-232 and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring Ethernet and GPRS
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (RS232)
- Dynamic DNS support
- Easy USB firmware upgrade
- IP65 rating with optional gasket

## SPECIFICATION WITHOUT CABIN

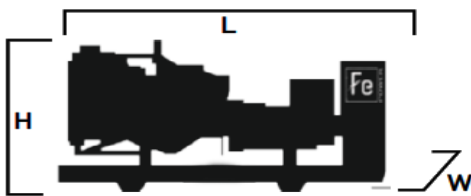

Length ( L )	mm	3500
Height ( H )	mm	1850
Width ( W )	mm	1200
Wet weight	kg	4422
Fuel Tank Capacity	L	345

## SPECIFICATION WITH CABIN

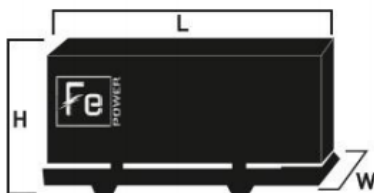

Length ( L )	mm	3500
Height ( H )	mm	2350
Width ( W )	mm	1600
Wet weight	kg	5502
Fuel Tank Capacity	L	580



**POWER**

[www.fepower.com.tr](http://www.fepower.com.tr)

0850 241 33 33

Osmangazi Mah. Mertler Cad. Şenlik Sokak No:6  
Sancaktepe/ istanbul / Türkiye